

Urbane II Cleanflush[™]

Sanitary Compartment - Ambulant Applications 4.5/3 litre Vitreous China Wall Faced Close **Coupled Toilet Suite**



Combining contemporary styling, industry leading rimless pan technology and GermGard® Antibacterial Protection; a unique technology which kills harmful bacteria, Caroma Cleanflush™ is a superior flushing system suitable for domestic and commercial applications. Incorporating several patented technologies: Caroma Flow Splitter™ Caroma Flow Balancer™ and Caroma Uni-Orbital® Connector, the Cleanflush pan is innovative and the next evolution in toilets. The Flow Splitter evenly flows water around the top of the bowl to meet at the Flow Balancer which directs the water powerfully into the sump, reducing the need for brush cleaning. The rimless pan is easy to clean and unlike traditional pan profiles, provides full visibility of any grime build up. Caroma Cleanflush™ provides a cleaner clean for peace of mind.

Reference must be made to AS 1428.1-2009 with current amendments to determine Important:

circulation space, grab rail and installation requirements. The dimensions in this sheet may change with amendments to the standard.

July 2021

Pan: Urbane II Cleanflush™ wall faced close coupled with GermGard®.

Universal trap for S or P-trap installations. Traps: Cisterns: Urbane II close coupled cistern - has a free fitting lid and is suitable for domestic and light

commercial applications. Available with internal overflow. Available in either back entry or bottom inlet options. Cistern inlet stop valve and inlet connection is concealed within the cistern and is included (back entry version only). Vandal Resistant Conversion Kit - A

simple to install conversion is available for the standard mechanism to lock lid onto the cistern, recommended for use in heavy use commercial areas. Code No.750109. Important: Working pressure minimum 30kPa to maximum 1000kPa flow pressure.

Rain water tank compliant. Accurate wall setout for B.S.P. 1/2" Nipple water inlet connection is essential.

The cistern button is suppplied in Chrome (C) but other colour options are available: Black **Buttons:** (B), Brushed Brass (BB), Brushed Nickel (BN), Gunmetal Grey (GM). Code No.687071.

> The Vogue soft close quick release thermoset toilet seat with GermGard® Antibacterial Protection; a unique technology which kills harmful bacteria, is provided as standard with seat caps in Stainless Steel (SS). Optional seat caps are available in 3 finishes, Brushed

Brass (BB), Black (B) or Gunmetal Grey (GM). Code No.254213.

Colour: Installation: The installation of the toilet suite shall be in accordance with the normal minimum drainline


grade requirements in AS/NZS 3500.2.

White only

Dimensions: All dimensions are in millimetres and are subject to normal manufacturing variations. Caroma pursues a policy of continuing improvement in design and performance of its products. The right is therefore reserved to vary specifications without notice.



cleanflush

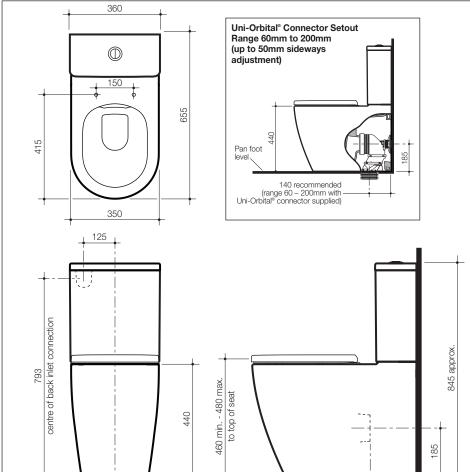

Reference must be made to the AS 1428.1-2009 Amd 1 to confirm installation requirements.

Adjust bedding height to ensure top of seat to finished floor height is in 460mm to 480mm range.

Seats:

Urbane II Cleanflush™ **Wall Faced Close Coupled Toilet Suite with Chrome** Cistern Button and Seat with Stainless Steel Seat Caps

4.5/3 litre Back Entry Internal Overflow with Vogue Soft Close Quick Release Seat

Code No.

746350

746250

4.5/3 litre RH Bottom Inlet

Internal Overflow with Voque Soft Close Quick Release Seat

> **D82 Concealed Fixing** Bracket (supplied)

Note: All height dimensions to underside of pan, make allowance for bedding when installing.

Bedding: The pan should be fixed to the floor with a sand cement mixture of 3:1 to a depth of 60mm. Do not use lime or fast drying cement in the bedding mixture. When bedded the back of the foot of the pan should be approximately 10mm above the finished floor.

Bracket fixing: The pan should be bedded with an acetic cured silicone sealant and fixed with the D82 Fixing Brackets supplied.

pan outlet