

Kara Wall Top Assemblies








Versions:202401

Drawing




Specifications

Watermark License WM-060073 **Temperature Rating** Min 1°C-Max 75°C Pressure Rating Min 150kpa - Max 500kpa

Packaging Includes

2x Handwheels 1x Allen Key

Finish & SKU



Chrome NR211709CH



Gun Metal NR211709GM Brushed Gold NR211709BG




Brushed Bronze NR211709BZ




Brushed Nickel NR211709BN

^{*}Dimensions are nominal measurements only.


Nero ———— 2 Kara Wall Top Assemblies - Manual

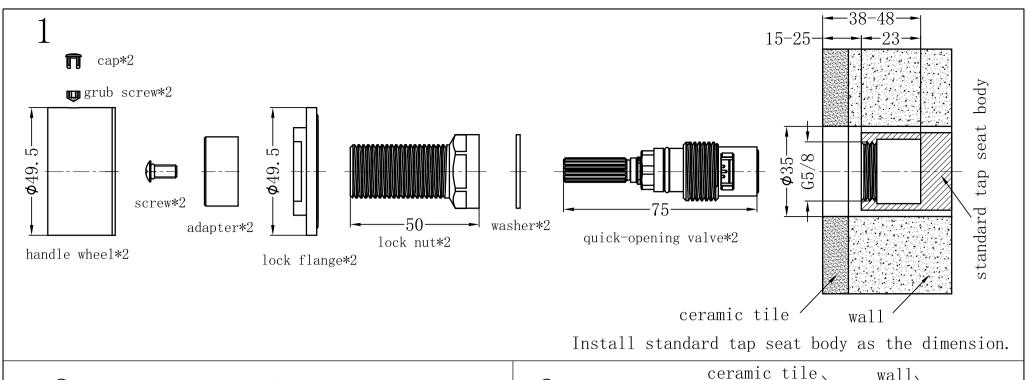

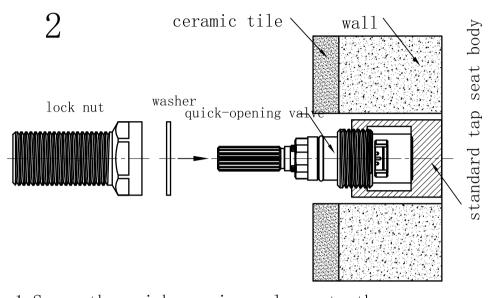


1. Screw the quick-opening valve onto the body tightly.


2. Put on the washer and screw the lock nut on the quick-opening valve.

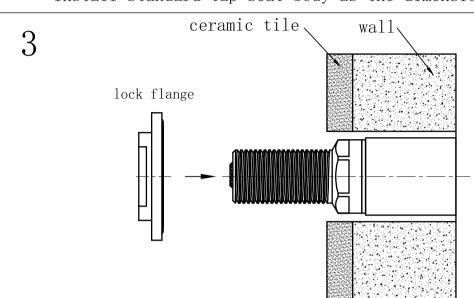

Screw lock flange tightly on the lock nut.

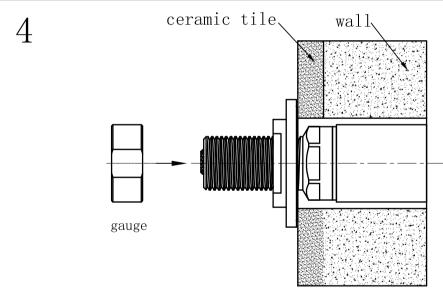



Screw gauge tightly on the lock nut.

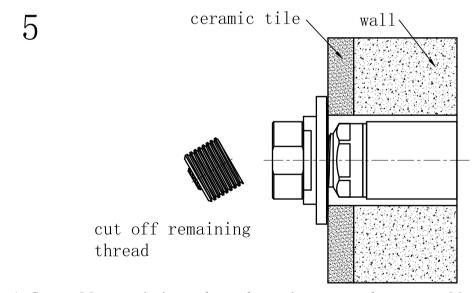

1. Cut off remaining thread against to the cut off gauge.

2. Use a file to make the cutting surface flat and smooth.

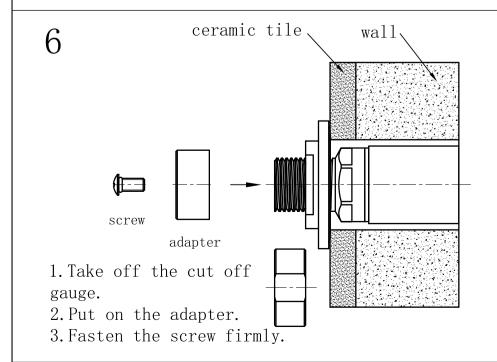

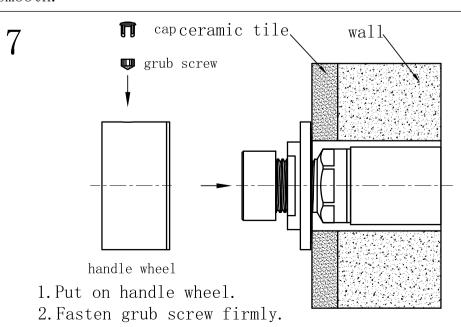

3. Put cap back on handle wheel.

Nero